**EZ-Wiring**®




## Multi-Tap/Switch Tap

Provides quick, simple, safe, cost-effective power or switch tap solution.


Pre-wired assembly expands single input in to multiple outputs or switched and non-switched outputs.

## Features and Benefits:

- ELECTEC EZ-Wiring® components are UL Listed to be in compliance with UL 183 – Manufactured Wiring Systems (QQVX) and CSA Certified to be in compliance with CSA 22.2 No. 203-1 - Manufactured Wiring Systems.
- Robust terminal design exceeds 470Amp for 4 seconds.
- EZ-Wiring® connectors are integrally moulded (fully encapsulated) utilizing high impact Halogen-free, Eco-Friendly, Low Smoke, UL94-V0 rated, Oxygen Index – 33%, RoHS-compliant polymers for superior strength, reliability and safety.
- Dielectric Withstand 3000Vac.
- Mating connectors are self-latching and shrouded for added protection.
- Uniquely-keyed and colour-coded to clearly indicate ratings and provide safe, simple, error-free connectivity. Only connectors having identical colours can plug together properly.
- Approved "Ballast Disconnect Means" per NEC 410.73(g) and CEC Part 1 30-308(4).
- Suitable for use in environmental air handling spaces (plenums) per NEC 300-22(c) and CEC Part 1 12-010(3)
- Acceptable for interrupting current (make or break) under full load.
- Mounting bracket for versatile installation.
- Compact size.

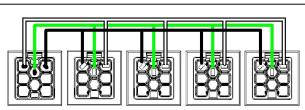

Multi-Tap 1 IN, 4 OUT (347/600V shown)

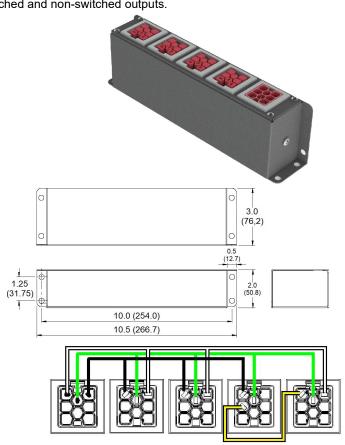

Switch Tap 1 IN, 2 OUT, Switch, 1 Switched OUT (347/600V shown)

## **Ordering Information**

Catalogue No.;

1H – VC – LNGO – M xxyyzz

VC System 22 = 125/250V 20A, 2D = 125/250V 20A + Control, **42** = 277/480V 20A, **4D** = 277/480V 20A + Control, **62** = 347/600V 20A, **6D** = 347/600V 20A + Control,

D2 = 60 Vdc 20 A,

DD = 60Vdc 20A + Control

**LNGO** Application

Power Distribution 1110 = (L,N,G)/(P,N,G) Switch

DALI/Class 1 (Control Wiring)

3w 4w **1011** = 1P Switch

1111 = Switch w/ Neutral

5w

**2111** = 3way w/ Neutral

**1112** = 1 circuit + control (L,N,G,2C)/(P,N,G,2C)

**XXYYZZ** Enclosure dimensions

xx = Length in inches, yy = Width in inches, zz = Height in inches

Colour

**G** = Gray, **K** = Black, **N** = Brown, **T** = Tan, **W** = White

Adhere to all Code requirements and carefully follow installation instructions





Consult EZ-Wiring® Configuration Matrix for selection of appropriate connector style to suit application.





